




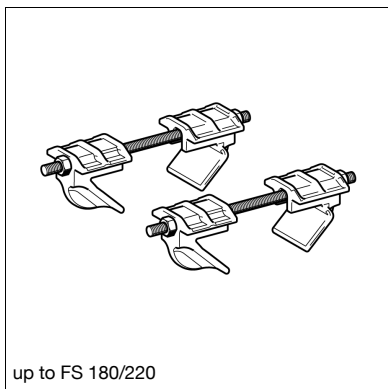


up to FS 180/220

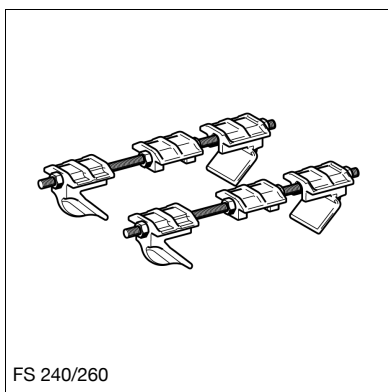

FS 240/260

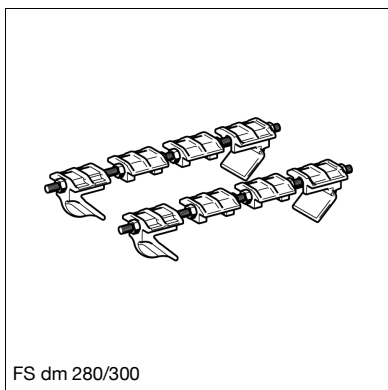

FS dm 280/300

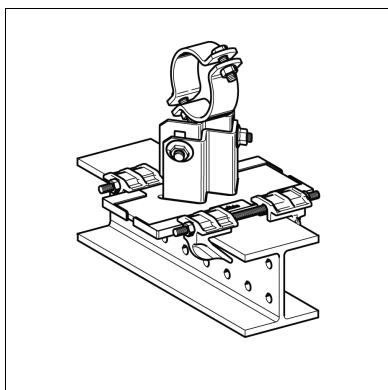

Guiding Set FS

Application

Element for completing Guided Pipe Shoes based on Sliding Pipe Shoes.
Max. beam flange width $t \leq 30$ mm

Scope of delivery

Pre-assembled Guiding Set containing:

4 Clamping hooks

2 Grub screws

Lift-off preventions:

2 for FS 240/260

4 for FS 280/300

Hexagon nuts:

4 for FS 80/120, FS 140/160 and FS 180/220 each

8 for FS 240/260 and 12 for FS 280/300

Technical Data

Flange Thickness [mm]	Beam Width 80 - 220 mm Tightening Torque [Nm]	Beam Width 221 - 300 mm Tightening Torque [Nm]
5 - 10	40	15
11 - 20	25	15
21 - 30	20	15

Material:

Metal sheets: Steel, HCP

Grub screws, nuts: Steel, HCP

Clamping hooks: Cast iron, HCP

Also available with DUALSHIELD for high corrosion protection within C5H environments.

Approvals / Conformity



Regular
Production
Surveillance



www.tuv.com
ID 0000080821

Type	For flange width [mm]	W [kg]	Qty. [set]	Part number
FS 80/120	80 - 120	2.0	1	110350
FS 140/160	121 - 160	2.1	1	110351
FS 180/220	161 - 220	2.3	1	110352
FS 240/260	221 - 260	2.8	1	110353
FS 280/300	261 - 300	3.3	1	112887