

Guiding Set FS Z

Application

For suspension of a Guided Pipe Shoe from a Simotec Beam Section 100 resp. 120 or another steel girder with a flange width of 80 up to 120 mm.
Max. beam flange width $t \leq 33$ mm

Scope of delivery

Two identical support rails and one connection kit comprising:
4 Beam Clips SPA 5P AU - M12 HCP
4 Hexagon Bolts M12 x 80 - 8.8 HCP
4 Hexagon Nuts M12-8 HCP
4 Washers 40/12/3 HCP

Installation



The guide rails are to be fixed with the attached connection kit below the beam with 2mm clearance to the support at the side. Torque for the M12 bolts of the Assembly Set = 85 Nm.

Technical Data

Material:
Metal parts: Steel, HCP
Grub screws, nuts: Steel, HCP

Also available with DUALSHIELD for high corrosion protection within C5H environments.

Approvals / Conformity

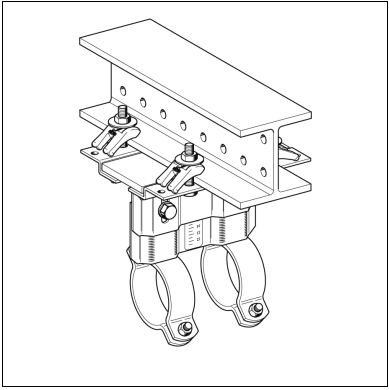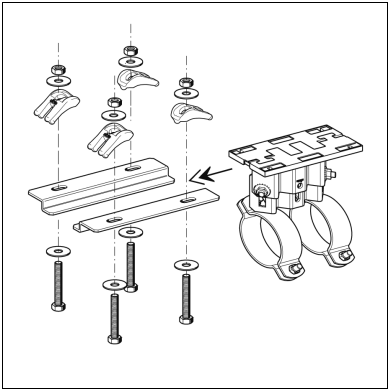

Type	For flange width [mm]	W [kg]	Qty. [set]	Part number
FS Z 80/120	80 - 120	2.7	1	110398