

Ducting Clamp PLU 2G-N

Group: 1622

Application


Two-piece pipe clamp for simple installation of spiral-seam ducts.

Scope of delivery

Clamping bolts are pre-mounted and retained. Pivot screw for safe and simple assembly with quick-set clip, suitable for "single-hand" mounting. Easier handling and better storage possibilities due to optimized packaging.

Installation


Tighten upper part of the pipe clamp without the interfering lower part. Hook the lower part, provided with a keyhole, into the fixed clamping bolt (see picture). After mounting of the pipe and locating into the pivot screw, the clamping bolt is fixed behind the bending; then tighten clamping bolt with max. 2 Nm.

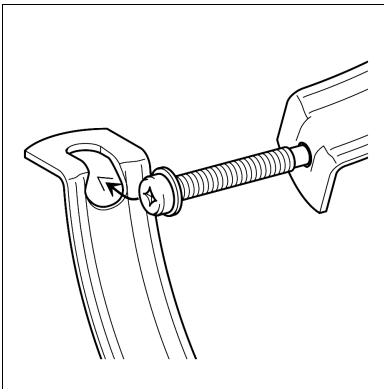

Technical Data

Type	Material [mm]	Perm. load capacity [kN]	Thread connection
71 - 200	20 x 1.5	0.8	M8/M10
224 - 500	25 x 1.5	1.0	M8/M10

Material: Steel, galvanised

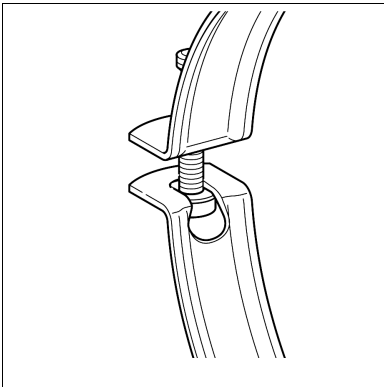

Type	W [kg]	Quantity [pack]	Part number
71	0.09	50	199626
80	0.10	50	199633
90	0.10	50	199640
100	0.11	100	199657
112	0.12	100	199664
125	0.13	100	199671
140	0.14	80	199688
150	0.15	80	199695
160	0.16	80	199701
180	0.17	50	199718
200	0.18	50	199725
224	0.34	50	199732
250	0.37	40	199749
280	0.38	40	199756
300	0.41	40	199763
315	0.45	40	199770
355	0.47	40	199787
400	0.56	30	199794
450	0.58	20	199800
500	0.67	20	199817