

Ducting Angle LUW A

Group: 1621

Application

Mounting Angle for rectangular ducts installed directly under the ceiling, or for suspended installation when using a threaded rod.

Types A-SL and A-SZ allow for soundproof installation also according to DIN 4109.

Scope of delivery


Types A-SL and A-SZ are equipped with pre-assembled sound absorption head.

Installation

Fixing to the duct with rivets (Ø 4 - 5 mm), sheet metal screws (Ø 4 - 5 mm) or M8 bolts.

Technical Data

Working load:	0.5 kN for A-L and A-Z 0.3 kN for A-SL and A-SZ
Material (metal component):	Steel, pre-galvanised
Types A-SL and A-SZ:	Up to 8.7 dB(A)
Inserted insulation:	
Sound absorption unit:	EPDM, black
Temperature range:	-50°C up to +100°C

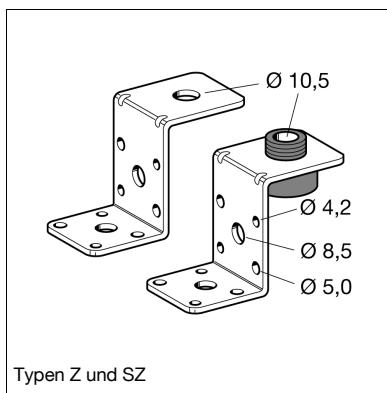

Type	Connection to building structure	Material [mm]	Length of legs [mm]	W [kg]	Quantity [pack]	Part number
A-L	M8/M10	35 x 2	35/85	0.05	100	110496
A-Z	M8/M10	35 x 2	35/46/38	0.05	100	110498
A-SL	M8/M10	35 x 2	35/85	0.06	100	110497
A-SZ	M8/M10	35 x 2	35/46/38	0.06	100	110499

