

Slide Set GS F 100 2G

Group: A436

Application


Pipe guide for twin-clamp connection designed to clutch the Beam Section F100 fixed by 2 x Self Forming Screws FLS.

Installation

Pipe clamp connection points "2G" receive M10 studs or M16 by adapter connection.

Technical Data

Type	a [mm]	b [mm]	c [mm]
GS F 80 2G2	150	67	70
GS F 100 2G2	150	67	75,5

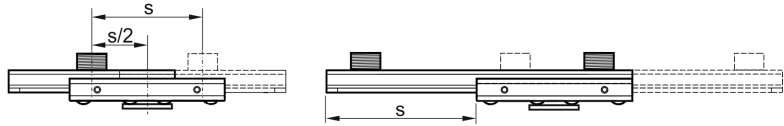

Type	Max. lever arm [mm]	Max. glide path s [mm]
GS F 80 2G	150	100
GS F 80 2G2	150	135
GS F 100 2G2	150	135

Perm. load support: 1,2 kN
 Perm. load suspended: 0,6 kN
 Permanent temperature range: 130° C
 Static friction coefficient μ_0 : 0,20
 Sliding friction coefficient μ : 0,15

Material:
 Slide element: Steel, HCP
 Slide bars: Polyamide (glass-fibre reinforced)
 Retaining plate: Steel, HCP

Type	W [kg]	Quantity [pack]	Part number
GS F 100 2G2	0.8	10	113093