


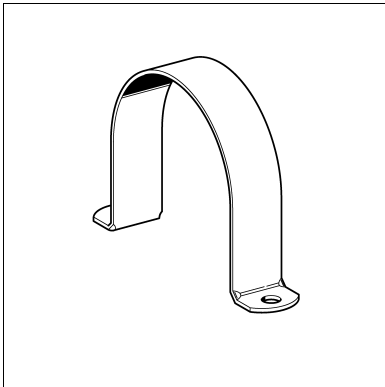

U Clamp RUC

Group: 1203

Application

For mounting pipes directly on a support, especially suitable as a replacement for U Bolts in connection with channels or cantilever brackets. When using T Bolts, their washer can be used in between the channel and the U Clamp. Dimensions and cross-sections are in keeping with the VdS standard.

Technical Data

Material: Steel, pre-galvanised as per DIN EN 10346

Type	For pipe	Material [mm]	B [mm]	L [mm]	Ø D [mm]	W [kg]	Quantity [pack]	Part number
18	3/8"	30 x 2.5	69	49	9	0.09	50	159012
22	1/2"	30 x 2.5	73	53	9	0.05	50	159021
28	3/4"	30 x 2.5	79	59	9	0.06	50	159030
34	1"	30 x 2.5	85	65	9	0.07	25	159049
43	1 1/4"	30 x 2.5	94	74	9	0.08	25	159058
49	1 1/2"	30 x 2.5	100	80	9	0.11	25	159067
61	2"	30 x 2.5	112	92	9	0.13	25	159076
77	2 1/2"	30 x 2.5	128	108	9	0.16	25	159085
90	3"	30 x 2.5	141	121	9	0.16	25	159094
115	4"	40 x 3.0	183	155	13	0.31	25	159100
141	5"	40 x 3.0	209	181	13	0.37	10	159119
169	6"	40 x 3.0	236	207	13	0.44	10	159128
221	8"	40 x 3.0	289	261	13	0.55	1	159137
275	10"	50 x 5.0	375	325	17	1.43	1	159146
326	12"	50 x 5.0	426	373	17	1.69	1	159155

