
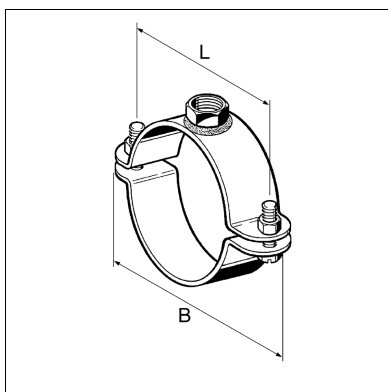


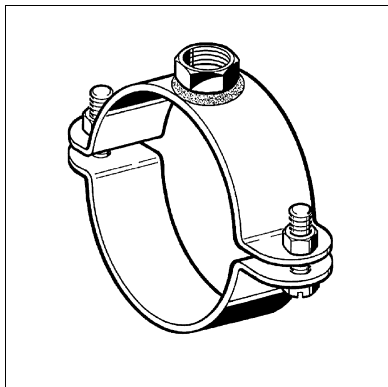

Stabil D-M16

Group: 1232

Application

For installation of pipes required for M&E services and in plant construction.

Scope of delivery

With welded M16 nut; clamping bolts and nuts included in loose form.

Technical Data

Size range [mm]	Max. adm. load (tension)	Tightening torque [Nm]
218 - 277	7.4 kN	10
318 - 407	9 kN	20
411 - 521	15 kN	20

The max. admissible load has been determined by using statistical methods resulting from the breaking loads, observing a max. admissible deformation of 1.5 mm resp. 2 % of the max. tensile pipe dia.

Material: Steel, electro-galvanised

Approvals / Conformity

FM-Approval for DN 218 - 277

Size range [mm]	Material W x th [mm]	Clamping bolts	B [mm]	L [mm]	W [kg]	Quantity [pack]	Part number
218 - 227	40 x 4.0	M12 x 40	301	275	1.18	10	118772
271 - 277	40 x 4.0	M12 x 40	351	325	1.42	10	118198
318 - 326	50 x 5	M16 x 60	440	390	2.60	1	103844
348 - 356	50 x 5	M16 x 60	471	421	2.82	1	103862
360 - 368	50 x 5	M16 x 60	483	431	3.04	1	103871
399 - 407	50 x 5	M16 x 60	520	470	3.10	1	103905
411 - 419	70 x 6	M16 x 60	532	482	5.12	1	103914
500 - 508	70 x 6	M16 x 60	619	569	6.06	1	103941
513 - 521	70 x 6	M16 x 60	631	581	6.34	1	103950