


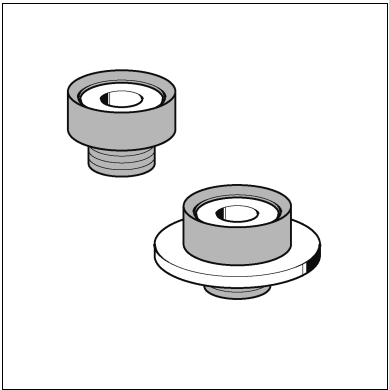

Sound Absorption Unit SDE

Group: 2712 / 1610

Application


Sound Absorption Element for use in combination with Sikla Channels in ducting systems (suitable also for sound proof requirements according to DIN 4109).

Scope of delivery

With inserted and retained washer.

Technical Data

Material: TPE, black
Max. admissible load: 0,3 kN
Temperature range: -50°C up to +110°C
Fire resistance: B2 according to DIN 4102, non-dripping
Hardness: 50°+/-5° Shore

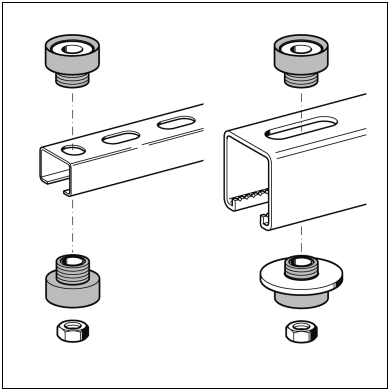

Type	For channel	Thread connection	Total-Height [mm]	Height of collar [mm]	W [kg]	Quantity [pack]	Part number
27		M8	15	7	0.01	100	197973
41	41	M8/M10	18	10	0.01	100	107802