

Channel Lining SAL

Group: 1611

Application


Sound Absorption Lining for inserting into Sikla Channels or fitting around threaded rods; mainly for use in ducting systems, also for sound proof installations as per DIN 4109.

Scope of delivery

Rolls of 30 m or pieces of 50 mm each.

Technical Data

Material:	SBR/EPDM, black
Temperature range:	-40°C up to +110°C
Fire resistance:	B2 according to DIN 4102, non-dripping
Hardness:	45°+/-5° Shore

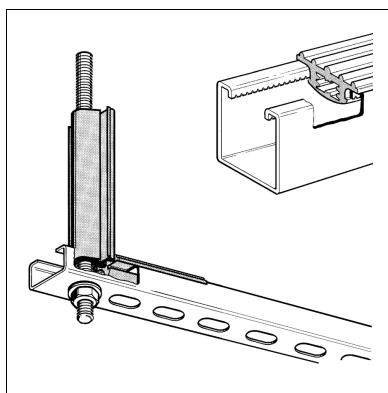

Type	Thread connection	Length of piece [mm]	Roll [m]	W [kg]	Quantity [pack]	Part number
27	M8/M10	-	30	6.00	1 Rolle	195963
27/L100	M8/M10	100	-	0.01	100	195970
41	M8/M10	-	30	14.27	1 Rolle	101189
41/L50	M8/M10	50	-	0.02	100	101204