

Slide Set GS CC - 2G-PL

Group: 1336

Application


Slide Set for single and double mounting of mechanical equipment to be used on Sikla Channels, brick or concrete walls and on bearers.

To be used preferably in combination with Sikla Pipe Clamps Ratio S and Stabil D-3G.

Various connection options with these pipe clamps ranging between M10 and R1".

For adapters for these connection options, see Adapter AD f/f in chapter "Pipe Clamps and Accessories".

Slide rails in polyamide, glass fibre reinforced.

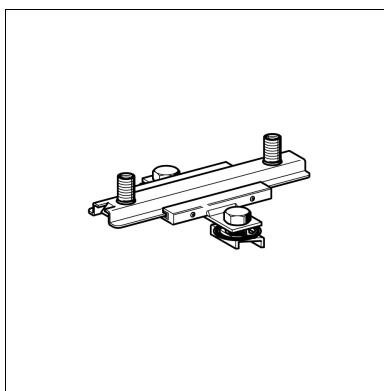

Scope of delivery

Slide Set incl. pre-assembled CC-component.

Installation

Locking in the channel by exerting slight pressure on the bolt head, then tighten - the job is done!

Technical Data

Permissible load for ceiling mounting:	0.6 kN
Permissible load for floor mounting:	1.2 kN
Lever L_{max} :	150 mm
Max. sliding distance Type 2G-PL:	85 mm
Max. sliding distance Type 2G2-PL:	140 mm
Temperature (permanent exposure):	130°C
Static friction coefficient μ_0 :	0.18
Sliding friction coefficient μ :	0.14

Material:


Metal components: Steel, electro-galvanised

Adm. load FZ * under stress of fire

FWD 30 [N]	FWD 60 [N]	FWD 90 [N]	FWD 120 [N]
≤ 600	≤ 430	≤ 280	≤ 200

FZ = max. adm. tensile load

* The load capacity of the connecting elements used is to be respected, this applies in particular under stress of fire.

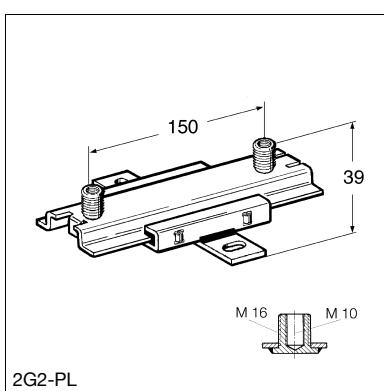

Type	W [kg]	Quantity [pack]	Part number
CC - 2G-PL	0.64	25	191711
CC - 2G2-PL	0.71	25	191729

