

Angle Connector CN CC 41 Stabil

Group: 1326

Application

Pre-assembled connecting element for frame structures made of channels.
Version W suitable for connections to wall, floor or ceiling.

- ◆ High-speed assembly system for 90°- and 45°-structures of Channels MS 41.
- ◆ Locks automatically by pushing down the bolt head and at the same time supports its own weight
- ◆ Secure, form-locking, non-positive connection. Serrated speed nut with clamping bolt M10. Ideal shaping and high-strength material for high stiffness.

Technical Data



| Channel thickness [mm] | FZ [kN] | FQ [kN] |
|------------------------|---------|---------|
| 1.5 | 3.0 | 2.3 |
| 2.0 | 3.5 | 2.3 |
| 2.5 | 3.5 | 3.5 |
| 3.0 | 3.5 | 3.5 |

Torque: 50 Nm
Material: Steel, pre-galvanised

Approvals / Conformity



This product has been awarded the RAL quality mark "pipe supports" and is subject to continuous external monitoring according to RAL GZ-655.

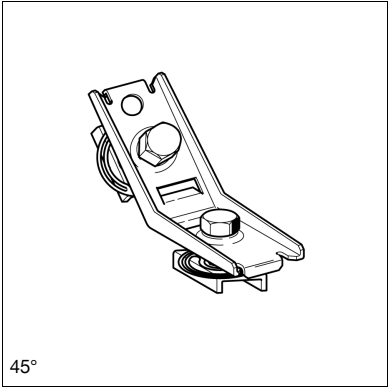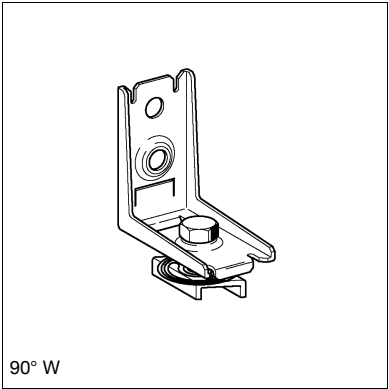

| Type | W [kg] | Quantity [pack] | Part number |
|--------------------|--------|-----------------|---------------|
| CC 41-90° Stabil | 0.23 | 25 | 191675 |
| CC 41-90° W Stabil | 0.17 | 25 | 191684 |
| CC 41-45° Stabil | 0.23 | 25 | 191882 |
| CC 41-45° W Stabil | 0.17 | 25 | 191891 |

