

LC-A

Slide Element GLE LC

Group: 1343

Application

Suspension slide element which can be fixed as a single mounting element directly to the ceiling or, in case of parallel pipe runs, to Sikla Channels.

- ◆ Pendular function allows for slight lateral movements.
- ◆ The slide roller located in the suspending section provides for smooth, jerk-free and silent sliding.
- ◆ Type LC-A is suitable for insulation thicknesses up to 25 mm.

Scope of delivery

Completely pre-assembled.

Installation

Type LC-I allows for height adjustment by offering a screw depth of up to 15 mm.


For fixing the position of the Slide Element, a locking nut has to be used.

Technical Data

Working load (tension):	1 kN
Sliding distance:	Max. 25 mm
Maximum swinging angle:	2°
Material:	Steel, electro-galvanised

Type	Thread connection to building structure	Thread connection to system x L	Height H [mm]
LC-A 22	M8 x 22	M8 x 22	76
LC-I	M8 x 22	M8 /15*	68

* range for height adjustment

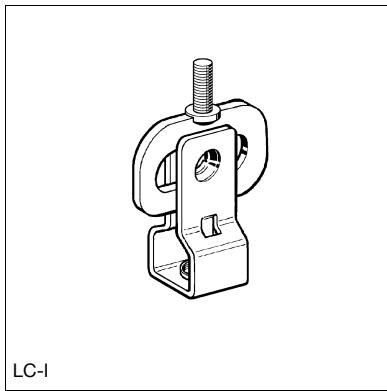

LC-I

Type	W [kg]	Quantity [pack]	Part number
LC-A 22	0.09	100	151069
LC-I	0.09	100	151078

