

Hole Saw LS

Group: 8139

Application

Instrument for making holes for Sikla Toggle Studs.

Scope of delivery

Without Holder and Centre Drill.


Installation

For boring purposes, screw the Hole Saw to a holder with centre drill (to be ordered separately).

Technical Data

Maximum service life may be achieved by using the Hole Saw at a speed of approx. 350 rpm.

Material: The bimetal Hole Saw has a drill bit of highly alloyed tool steel.

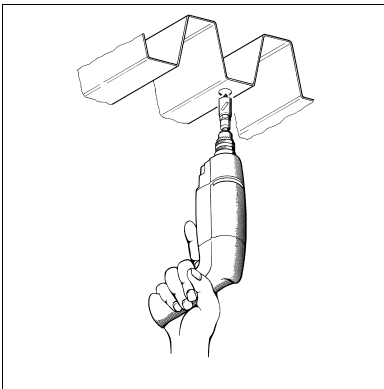

| Type | Bore Ø [mm] | Toggle Stud application | W [kg] | Quantity [pack] | Part number |
|-------|----------------|----------------------------|-----------|--------------------|----------------|
| LS 22 | 22 | M8 | 0.04 | 1 | 133144 |
| LS 25 | 25 | TD 10 | 0.05 | 1 | 133135 |