

## Clamp VBO C 40

Group: 1312

### Application

Developed for COFRASTA 40 composite ceilings. May be used for single or crossbar mounting solutions. The holder is mainly used in ventilation systems. When mounting, make sure that the threaded rods are screwed in sufficiently and retained well, thus preventing any accidental unscrewing.

### Scope of delivery


Special washer (rectangular) is included in loose form; without grub screw. With riveted hexagon nut.

### Technical Data

Max. working load: 2 kN

When using crossbars or mounting plates, the working load may be increased on the basis of the number of clamps used for the overall structure. The carrying capacity of the ceiling may restrict the application.

Material: Steel, electro-galvanised

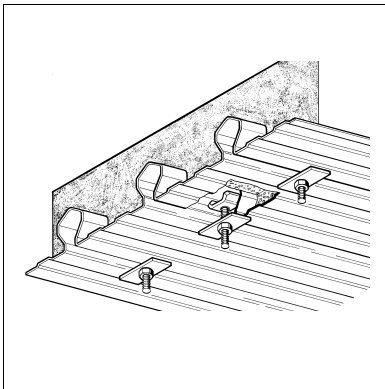

Type	Available length of thread [mm]	Thread connection	W [kg]	Quantity [pack]	Part number
C 40/0/M8	variabel	M8	0.13	100	<b>146575</b>
C 40/0/M10	variabel	M10	0.14	100	<b>146478</b>