

Sealant DP 30/45

Group: 1252

Application


For diffusion-proof installation of Sikla Chilled Water Fixed Point Clamp.

Scope of delivery

In cartridges of 310 ml.

Installation

Prior to fitting a Chilled Water Fixed Point Clamp, a thin ring-shaped Sealant is to be applied to the enhanced ring. After mounting of the clamp, check if the cant of the PUR-clamp fits exactly. The most favourable processing temperature is 20°C up to 25°C.

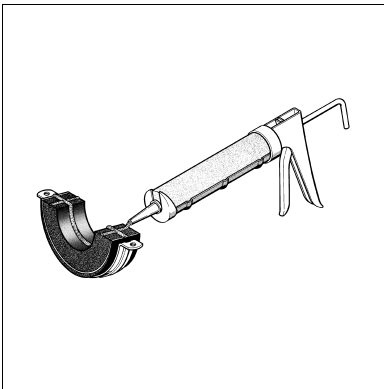

Technical Data

Steam diffusion resistance: $\mu \approx 10\,000$

Temperature range: -80°C up to +90°C

Silicone-free

Type	W [kg]	Quantity [pack]	Part number
30/45	0.49	1	146283