


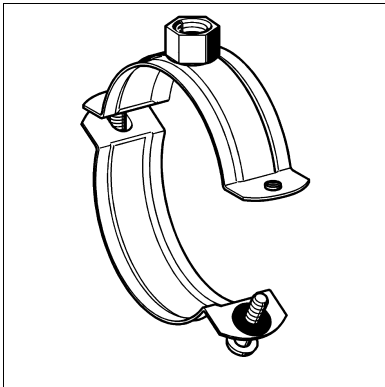

Duo Clamp SRS ss

Group: 1722

Application

Two-piece clamp with thread connection M8 or M10 for the installation of pipelines.

Scope of delivery

Supplied with two bolts particularly pre-screwed on one side and therefore ready for immediate installation. The clamping bolt on the open side is retained by a plastic washer, thus preventing any accidental unscrewing.

Technical Data

Type	Thread connection	Max. perm. working load (tension)	Tightening torque [Nm]
13 - 73	M8	0.6 kN	2
75 - 169	M10	2.5 kN	2

The recommended load is calculated using specific statistical methods relating to break load and is designed to restrict deflection to 1.5 mm or 2 % of the maximum applicable clamping diameter.

Material: Stainless steel A4

Size range [mm]	For pipe [NB]	Material W x th [mm]	W [kg]	Quantity [pack]	Part number
13 - 18	$\frac{1}{4}'' + \frac{3}{8}''$	20 x 1.5	0.04	100	170587
19 - 22	$\frac{1}{2}''$	20 x 1.5	0.05	100	170602
27 - 30	$\frac{3}{4}''$	20 x 1.5	0.05	100	170611
32 - 36	1"	20 x 1.5	0.05	100	170620
40 - 44	$1 \frac{1}{4}''$	20 x 1.5	0.06	50	170639
48 - 54	$1 \frac{1}{2}''$	20 x 1.5	0.07	50	170648
60 - 66	2"	20 x 1.5	0.08	50	170657
68 - 73	-	20 x 1.5	0.09	25	173342
75 - 80	$2 \frac{1}{2}''$	25 x 2.0	0.15	25	170666
84 - 89	3"	25 x 2.0	0.16	25	170675
102 - 108	-	25 x 2.0	0.19	25	173351
110 - 115	4"	25 x 2.0	0.20	25	170684
129 - 140	5"	25 x 2.5	0.26	25	110882
159 - 169	6"	25 x 2.5	0.31	25	110883