

100/100

Support Bracket WK HCP

Group: 1826


Application

Sikla Support Brackets may be used for wall, floor and overhead pipe installations. Depending on the site, pipes may lie on the support bracket (U-bolt), be arranged in vertical position or be suspended (Grub Screws). In combination with bolted-on channels, the support brackets offer a wide range of possibilities for cantilever arrangements. In addition, the load capacity of crossbars can be increased by fixing them onto Support Brackets.

Technical Data


Material: Steel, HCP

For further details regarding dimensions and loads, see chapter "Brackets" (galvanised versions).

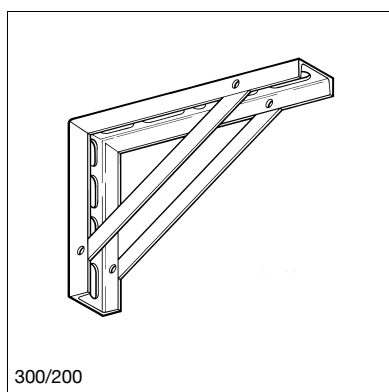


300/200

| Type | Channel | W [kg] | Quantity [pack] | Part number |
|------------|---------|-----------|--------------------|----------------|
| 100/100-40 | - | 0.23 | 25 | 163930 |
| 150/150 | - | 0.60 | 25 | 181685 |
| 300/200 | U 50/25 | 2.28 | 1 | 162531 |
| 550/350 | U 50/25 | 4.62 | 1 | 162610 |
| 725/400 | U 65/42 | 12.72 | 1 | 151041 |
| 880/550 | U 65/42 | 18.43 | 1 | 151050 |

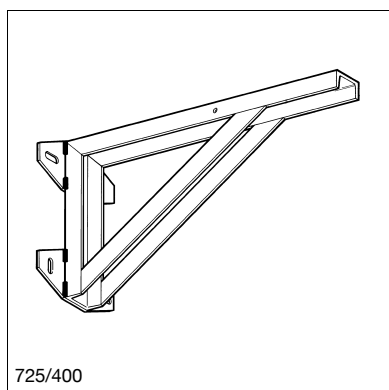

725/400

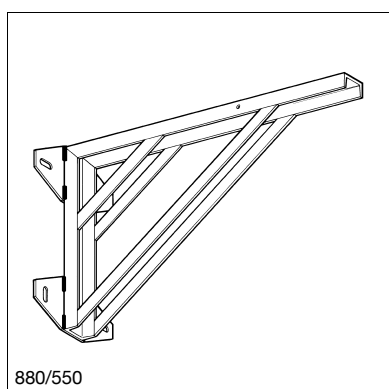

880/550