

End Support STA F 80/30-Q

Group: A422

Application

Plug-in component designed to create an endplate at the open end of a Beam Section TP F 80 or TP F 80/30. A connection to Cantilever brackets AK F 80 or AK F 80/30 can also be realised e.g. for cable trays and downpipes.

Installation

Depending on the situation, different options are recommended:

- With 2 x 4 Self Forming Screws FLS when used to connect 2 Beam Sections.
- With 4 Self Forming Screws FLS applied to the insert and 2 suitable M12 wall anchors/fixings when connected to the building structure.

Technical Data

| Type | Dimensions of base plate [mm] | L [mm] | d [mm] | b ₁ x l ₁ [mm] |
|-------------|-------------------------------|--------|--------|--------------------------------------|
| STA F 80/30 | 190 x 80 x 8 | 169 | 14 | 11 x 20 |

Material: Steel, HCP

Also available with DUALSHIELD for high corrosion protection within C5H environments.



Approvals / Conformity

CE-mark (Declaration of performance see www.sikla.com/downloads)
ETA-24/0471



epd

NEPD-4539-3797-EN

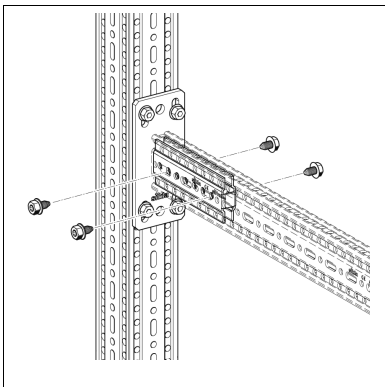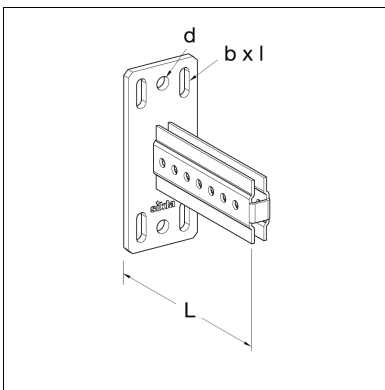

| Type | W [kg] | Quantity [pack] | Part number |
|---------------|--------|-----------------|-------------|
| STA F 80/30-Q | 1.4 | 1 | 117294 |