


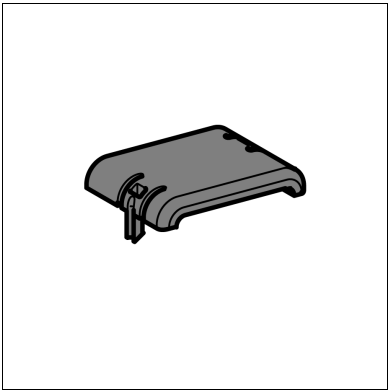

Pad U-UB F 80

Group: A430

Application

Insulation and surface protection pad to be used on demand when a pipes' expansion and contraction occurs directly on the F80 section.

Technical Data

Max. adm. load: 6.5 kN
Material: Polyamide PA 6.0
Range of temperature: -20° up to +130° C

Type	W [kg]	Quantity [pack]	Part number
U-UB F 80	0.01	50	198797

