

Slide Set GS 1G


Group: 1336

Application

Slide Set for mounting of small pipe lines with possible elongation of length. Space-saving and thus also to be used for smaller centre distances, especially in combination with pipe clamps Ratio S and LS. The stop at the skid avoids the pipe line from sliding and at the same time is a comfortable guide for rising pipes. Guiding corrugations guarantee the exact 90° arrangement and avoid the screwing up of the slide set.

Installation

Connection to Channel System 41, ideally use flange screw SCR FLA M10 x 20 A4. Fixation with hexagon bolt M8 or M10 is also possible.

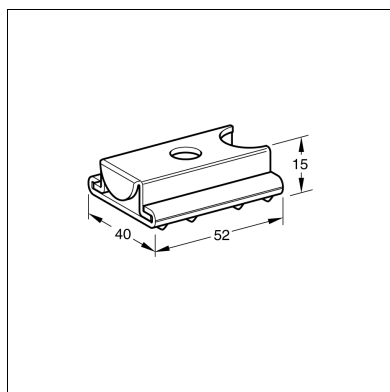

Technical Data

Permissible load for ceiling mounting:	0.6 kN
Permissible load for floor mounting:	1.2 kN
Lever arm L_{max} :	75 mm
Permissible bending moment for wall mounting:	20 Nm
Maximum sliding distance:	45 mm
Static friction coefficient μ_0 :	0.15
Sliding friction coefficient μ :	0.13

Material:

Steel, electro-galvanised

Type	Thread connection	W [kg]	Quantity [pack]	Part number
1G	M10	0.08	25	198834

