

M6 - M10

Speed Nut NT CC 41 ss

Group: 1714

Application

In particular useful when installing in vertical channels or in places of difficult access.

Further advantages:

- ◆ For all Sikla Channels of type 41, independent of the height of the channel.
- ◆ No getting stuck on bolt heads when sliding in the channel.
- ◆ No appearance of settlement after tightening.


Scope of delivery

Channel Nut and Spring are tightly connected.

Installation

After inserting the Speed Nut into the channel opening, it is - by exerting slight pressure on it - turned to the right as far as it will go; deinstallation may be effected by following the instructions in reverse order.

Installation and deinstallation do not require tools and may be repeated several times.

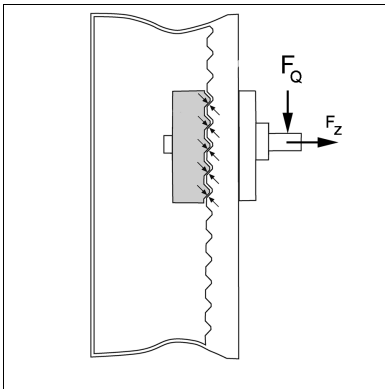

Technical Data

	M6	M8	M10
Tightening torque [Nm]	10	25	40

Material thickness channel [mm]	M6	M8	M10	M6	M8	M10
	FZ ≤ [kN]	FZ ≤ [kN]	FZ ≤ [kN]	FQ ≤ [kN]	FQ ≤ [kN]	FQ ≤ [kN]
2.0	3.2	5.8	5.8	0.9	2.1	3.4
2.5	3.2	5.8	5.8	1.0	2.6	4.1

Note: The admissible load capacities of the channels are to be taken into account.

Material:

Nut: Stainless steel (A4)

Spring: Sheet metal spring steel, rustproof

Type	W [kg]	Quantity [pack]	Part number
CC 41-M6	0.02	50	199299
CC 41-M8	0.03	50	199305
CC 41-M10	0.03	50	199312