


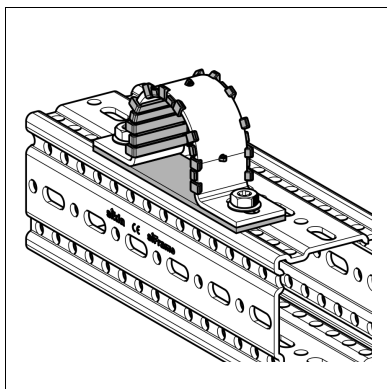

Assembly Group BG52 F80/100

Groep: 1102

Toeassing

An Assembly Group for the creation of guided supports for pipes without complex requirements and generally without insulation. As an alternative to U-bolts, this U-clamp is ideal for space-saving, direct assembly on the supporting structure. The slide plate reduces the friction between the pipe and supporting structure (siFramo sections).

A galvanic separation between the pipe and U-clamp and the supporting structure is achieved through the plastic linings and slide plate, meaning that VA pipes can also be secured, for example.

Inhoud

Each Assembly Group is pre-assembled, packed and labeled.

Parts list:

Item 1 U-Clamp RUC I

Item 2 Self Forming Screw FLS F

Montage

The assembly of the individual components to form an Assembly Group is carried out during the course of pipe installation on the construction site.

Technische gegevens

Material:

Clamp body:



Steel, HCP

Lining and slide plate:

Thermoplastic resins

Area of use:

-20°C to +90°C (at lining and slide plate)

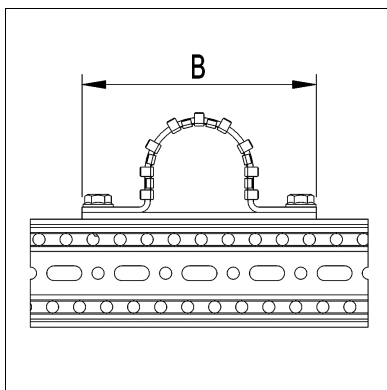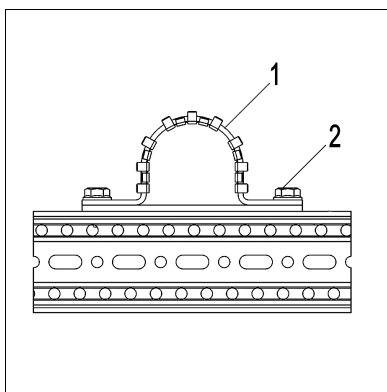

Tip, Tipo, Tipo, Tipus, Typ, Typ, Typ, Typ, Type, Type, Type	Nennweiten [DN], Nennweiten [DN], Nennweiten [DN], Nominal widths [DN]	B [mm], B [mm], B [mm], B [mm], B [mm], B [mm], B [mm], B [mm], Largeur B [mm]	G [kg], G [kg], G [kg], G [kg], G [kg], Hmotnost [kg], Peso [kg], Peso [kg], Poids [kg], W [kg]	Amb. [Buc], Bal. [kus], Bal. [kus], Condit. [pièces], Csom. egység [db], Embalaje [pieza], Opak. [szt.], Quant. [caixa], Quantity [pack], Verp. [Stück], Verp. [Stuk]	Artikel- Nr.
22	15	128	0,28	1	114656
28	20	134	0,29	1	114657
35	25	141	0,32	1	114658
43	32	149	0,34	1	114659
49	40	155	0,36	1	114660
62	50	168	0,41	1	114661
77	65	183	0,48	1	114662
90	80	196	0,52	1	114663
116	100	222	0,61	1	114664
141	125	247	0,71	1	114665
170	150	276	0,83	1	114666
221	200	327	0,99	1	114667
275	250	381	1,20	1	114668
275	300	431	1,34	1	114669