


Measurements

Supports without insulation insert

Pipe NB	Pipe D	Pipe Clamp B [mm]	Pipe Clamp Material [mm]	Hex. bolts
15	22	86	30 x 5	M10 x 40
20	27	93	30 x 5	M10 x 40
25	34	102	30 x 5	M10 x 40
32	43	114	30 x 5	M10 x 40
40	49	119	30 x 5	M10 x 40
50	61	136	40 x 5	M12 x 45
65	77	152	40 x 5	M12 x 45
80	89	165	40 x 5	M12 x 45
100	115	165	50 x 5	M12 x 50
125	140	183	50 x 5	M12 x 50
150	169	215	50 x 8	M12 x 55
200	220	252	50 x 8	M12 x 55
250	273	306	50 x 8	M12 x 55
300	324	347	60 x 8	M16 x 60
350	356	375	60 x 8	M16 x 60
400	407	423	70 x 8	M16 x 65
500	508	524	70 x 8	M16 x 65
600	610	626	70 x 8	M16 x 65

Supports with insulation insert

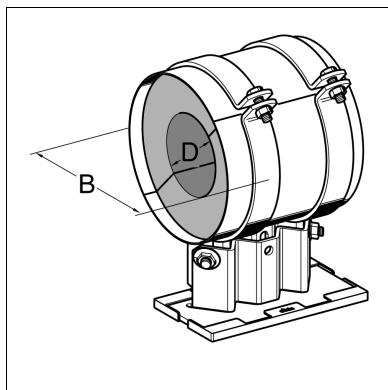

Pipe NB	Pipe D	Insulation Thickness [mm]	Insulation Length [mm]	Pipe Clamp B [mm]	Pipe Clamp Material [mm]	Hex. bolts
25	33.7	50	100	180	50 x 5	M12 x 50
32	42.4	50	100	187	50 x 5	M12 x 50
40	48.3	50	100	190	50 x 5	M12 x 50
50	60.3	50	100	199	50 x 5	M12 x 50
65	76.1	60	100	237	50 x 8	M12 x 55
80	88.9	60	100	245	50 x 8	M12 x 55
100	114.3	60	200	278	50 x 8	M12 x 55
125	139.7	60	200	295	50 x 8	M12 x 55
150	168.3	60	200	319	60 x 8	M16 x 60
200	219.1	60	200	363	60 x 8	M16 x 60
250	273.0	60	200	412	60 x 8	M16 x 60
300	323.9	80	200	503	70 x 8	M16 x 65