


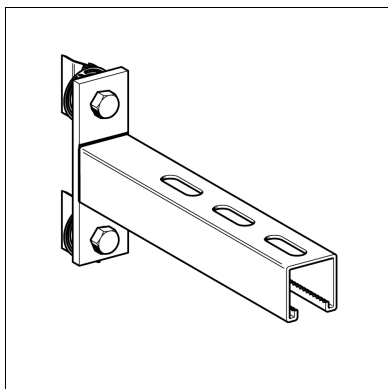

## Cantilever Bracket CC

Group: 1354

### Application


Ready-to-use bracket mainly for mounting pipes or canal to channels.

### Installation

When used in combination with Slide Elements, a Tie Rod is absolutely essential for absorbing the forces running along the centre line of the pipe. For cantilever lengths  $\geq 500$  mm we recommend the integration of a prop-up.

### Technical Data

Material: Steel, electro-galvanised

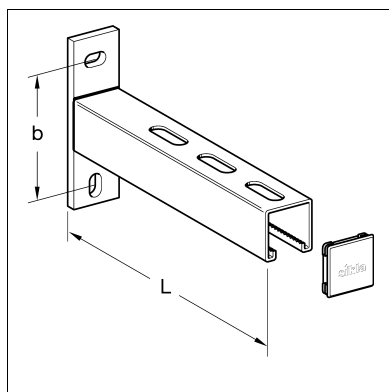

| Type          | L<br>[mm] | Wall plate<br>[mm] | b<br>[mm] | W<br>[kg] | Quantity<br>[pack] | Part<br>number |
|---------------|-----------|--------------------|-----------|-----------|--------------------|----------------|
| CC 41/41-200  | 196       | 134 x 40 x 8       | 100       | 0.79      | 10                 | <b>191792</b>  |
| CC 41/41-260  | 258       | 134 x 40 x 8       | 100       | 0.90      | 10                 | <b>191801</b>  |
| CC 41/41-320  | 321       | 134 x 40 x 8       | 100       | 1.05      | 10                 | <b>191819</b>  |
| CC 41/41-445  | 446       | 134 x 40 x 8       | 100       | 1.27      | 10                 | <b>191828</b>  |
| CC 41/41-570  | 571       | 134 x 40 x 8       | 100       | 1.80      | 10                 | <b>191837</b>  |
| CC 41/41-820  | 821       | 134 x 40 x 8       | 100       | 2.00      | 1                  | <b>191846</b>  |
| CC 41/41-1010 | 1008      | 134 x 40 x 8       | 100       | 2.87      | 1                  | <b>191855</b>  |