


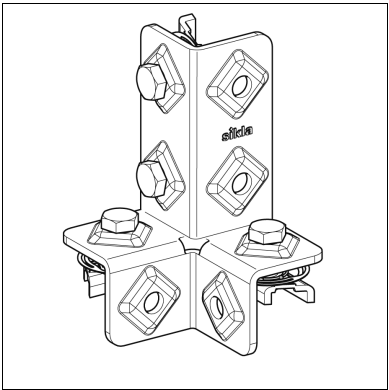

Angle Connector EV CC 41-5

Groep: 1352

Toeassing

Pre-assembled connecting element for three-dimensional frame structures, optimised for linking channels of the 41 series at an angle of 90°. Preferably used in combination with 41/41 square channels. The adjustment for the channel opening could still be chosen.

- ◆ Fast-Technique for 90° joints of Channel System 41.
- ◆ Locks automatically when being put in place and supports its own weight.
- ◆ Secure, form-locking, non-positive connection. Serrated Channel Nut with Hexagon Bolt M10.
- ◆ Ideal shaping for high stiffness.
- ◆ The proven Sikla rhomb guarantees a secure torque and preload force.

Montage


To be used in pairs.

Technische gegevens

Max. perm. load: 5.0 kN centre load per crossbar fixed with 2 Angle Connectors EV CC 41-5.

Torque: 40 Nm

Material: Steel, electro-galvanised

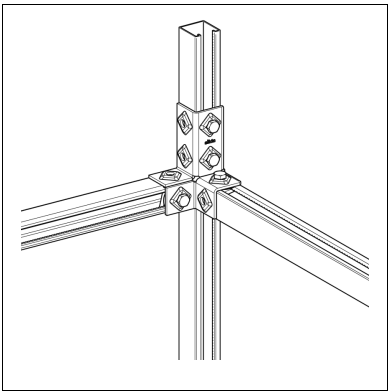

Tip, Tipo, Tipo, Tipus, Typ, Typ, Typ, Type, Type, Type	G [kg], G [kg], G [kg], G [kg], G [kg], G [kg], Hmotnost [kg], Peso [kg], Peso [kg], Poids [kg], W [kg]	Amb. [Buc], Bal. [kus], Bal. [kus], Condit. [pièces], Csom. egység [db], Embalaje [pieza], Opak. [szt.], Quant. [caixa], Quantity [pack], Verp. [Stück], Verp. [Stuk]	Artikel-Nr.
EV CC 41-5	0,69	10	117465